



DIMENSIONS

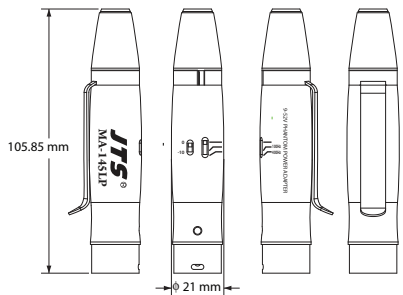

JTS[®]

MA-145LP Phantom Power Adapter

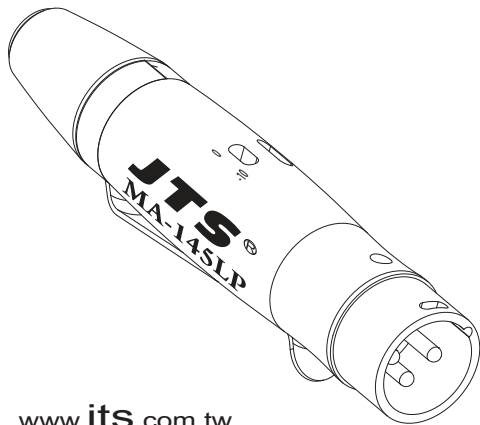

59010-077-02

www.jts.com.tw

FEATURES

This product provides power to miniature condenser microphones through phantom power. It works with all CM lavalier, headset and ear-hook microphones.


MA-145LP

MIC Input.....	4P Mini XLR(Male)
Output.....	XLR(Male)
Phantom Power.....	9~52V
PAD.....	-10dB
Low Cut.....	400Hz -4dB 100Hz -6dB
Frequency Respond	35Hz~20KHz
Signal to Noise Ratio	>110dB
THD%.....	<0.065%
Dimension(mm).....	φ 21mm*105.85mm(H)
Net Weigh.....	51.3g

POWER SUPPLY


MA-145LP can be powered by JTS's PS-1, Phantom Power Supply or other 9V to 52V phantom power in the mixer.

MA-145LP Phantom Power Adapter

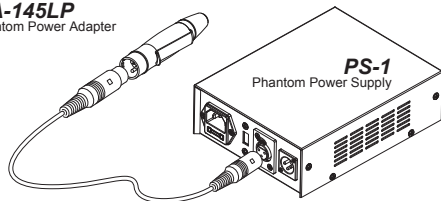

PIN CONFIGURATION

Input: 4P Mini XLR (Male)
Pin 1: GND
Pin 2: V+
Pin 3,4: Audio signal



Output: XLR (Male)
Pin 1: GND
Pin 2,3: Audio signal
(Phantom Power Supply)

