


ASB6118 High Power Single 18" Subwoofer

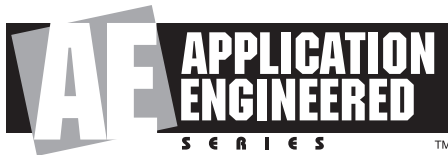

Key Features:

- ▶ 1 x 18" 2242H SVG™ Driver.
- ▶ Large vent area for high output with low distortion.
- ▶ Arrays with various AE Series mid-high frequency 2-way models (see AE Series Array Guide).

Applications:

- ▶ Performing arts facilities
- ▶ Theatrical sound design
- ▶ Auditoriums
- ▶ Houses of worship
- ▶ Live clubs
- ▶ Dance-clubs/discotheques
- ▶ Sports facilities
- ▶ Themed entertainment venues

ASB6118 is a high power subwoofer system comprised of one 460 mm (18 in) SVG Super Vented Gap low frequency driver in a vented, front-loaded configuration for extended bandwidth. The rectangular cabinet is fitted with M10 threaded suspension points. Pre-engineered array bracketry is available.

ASB6118 is part of JBL's AE Application Engineered Series, a versatile family of loudspeakers for a wide variety of applications.



Specifications:

| | |
|---|--|
| System: | |
| Frequency Range (-10 dB): | 28 Hz – 1 kHz |
| Frequency Response (±3 dB): | 35 Hz – 1 kHz |
| Transducer Power Rating (AES) ¹ : | 1200 W (4800 W peak), 2 hrs |
| Long-Term System Power Rating ² : | 800 W (3200 W peak), 100 hrs |
| Maximum SPL: | 30 Hz – 100 Hz: 129 dB-SPL cont avg (135 dB peak) 100 Hz – 500 Hz: 129 dB-SPL cont avg (135 dB peak) |
| System Sensitivity (dB-SPL, 1W @ 1m): | 30 Hz – 100 Hz: 98 dB 100 Hz – 500 Hz: 98 dB |
| Nominal Impedance: | 8 ohms |
| Transducers: | |
| Low Frequency Driver: | 1 x JBL 2242H 460 mm (18 in) SVG™ driver with 100 mm (4 in) voice coil |
| Physical: | |
| Enclosure: | Rectangular cabinet, 16 mm (5/8 in) exterior grade 11-ply Finnish birch plywood |
| Suspension Attachment: | 12 points (3 top, 3 bottom, 2 each side, 2 rear), M10 threaded hardware |
| Finish: | Black DuraFlex™ finish. White available upon request. |
| Grille: | Powder coated 14 gauge perforated steel, with acoustically transparent black foam backing. |
| Input Connector: | NL4 Neutrik Speakon® and CE-compliant covered barrier strip terminals. Barrier terminals accept up to 5.2 sq mm (10 AWG) wire or max width 9 mm (.375 in) spade lugs. Speakon in parallel with barrier strip for loop-through. |
| Environmental Specifications: | Mil-Std 810; IP-x3 per IEC529. |
| Dimensions (H x W x D in vertical cabinet orientation): | 548 x 561 x 816 mm (21.6 x 22.1 x 32.2 in) |
| Net Weight: | 44.5 kg (98 lb) |
| Optional Accessories: | M10 x 35 mm forged shoulder eyebolts with washers. Optional planar array frame kit. See AE Series Bracket Guide |

¹AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plus long-term 100 hr rating are specified for low-frequency transducers.

²AES standard, one decade pink noise with 6 dB crest factor, in cabinet, long-term 100 hr rating.


³Calculated based on power rating and half-space (2π) sensitivity, exclusive of power compression.

⁴Half-space (2π) loading, averaged in specified frequency band.



JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

▶ ASB6118 High Power Single 18" Subwoofer

Frequency response is measured on-axis at a distance referenced to 1 m @ 1 watt (2.83 Vrms) input, shown as half-space (2π , solid line) and full-space (4π , dotted line) environment.

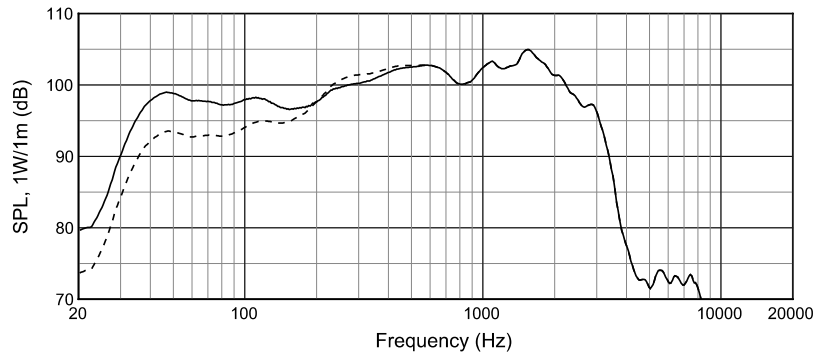


Electrical Input Impedance

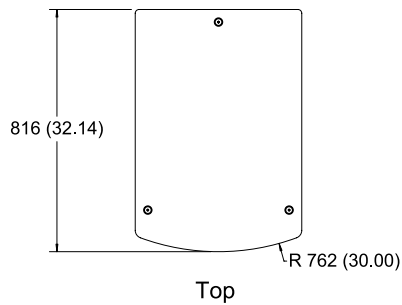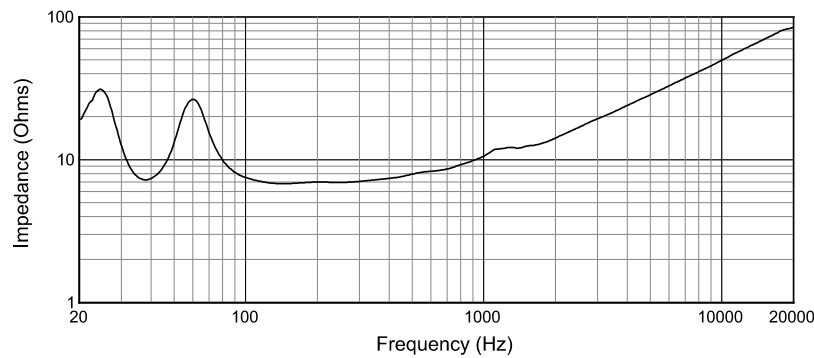


Dimensions in mm (in).

For more detailed dimensional information, refer to Application Data Sheet.


For AE & AE Compact Series WRC and WRX versions please visit the JBL Pro website at <http://www.jblpro.com/www/products/installed-sound/ae-series#.V63kVfkrLIV> to download Drawings.



Front



Side



Back



JBL Professional
8500 Balboa Boulevard, P.O. Box 2200
Northridge, California 91329 U.S.A.

A Harman International Company
© Copyright 2016 JBL Professional

SS ASB6118
CRP 10M
8/16