

GM-5212DU

Order No. 0236280



GM-5215DU


Order No. 0236300



Double gooseneck microphones

- Back electret supercardioid cartridges
- High sensitivity
- 10 dB attenuator
- Low cut switch
- Flexible positioning due to vertically adjustable goosenecks (160°)
- Common 3-pole XLR plug
- Operation via +48 phantom power

Model	GM-5212DU	GM-5215DU
Polar pattern	supercardioid	supercardioid
System	back electret	back electret
Audio frequency range	80-18,000 Hz	80-18,000 Hz
Nominal impedance	220 Ω	220 Ω
Sensitivity	16 mV/Pa	16 mV/Pa
Max. sound pressure	125 dB	125 dB
Power supply	= 48 V phantom power	= 48 V phantom power
Dimensions	415 mm	492 mm
Weight	315 g	335 g
Connection	XLR, bal.	XLR, bal.

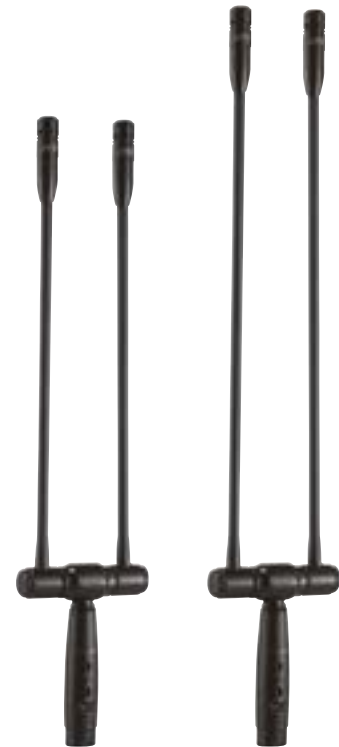

GM-5212LDU

Order No. 0236290



GM-5215LDU

Order No. 0236310



Double gooseneck microphones with LED

- Back electret supercardioid cartridges
- High sensitivity
- 10 dB attenuator
- Low cut switch
- LED for indicating operating status
- Flexible positioning due to vertically adjustable goosenecks (160°)
- Common 3-pole XLR plug
- Operation via +48 V phantom power

Model	GM-5212LDU	GM-5215LDU
Polar pattern	supercardioid	supercardioid
System	back electret	back electret
Audio frequency range	80-18,000 Hz	80-18,000 Hz
Nominal impedance	220 Ω	220 Ω
Sensitivity	16 mV/Pa	16 mV/Pa
Max. sound pressure	125 dB	125 dB
Power supply	= 48 V phantom power	= 48 V phantom power
Dimensions	415 mm	492 mm
Weight	315 g	335 g
Connection	XLR, bal.	XLR, bal.

