



# NEW PRODUCT INFORMATION

## i4 / i4T

### Installation speakers

New 4.0" models join the Wharfedale Pro i-series of two-way high performance loudspeakers, specifically designed for distributed music, paging and speech applications.

The new i4, and transformer equipped i4T models feature quality 4.0" low frequency transducers and 1" dome tweeters both housed inside a durable, IP54 certified ABS enclosure - with a fully protective front grille.

i4 is a low-impedance 8Ω model while the i4T features an internal transformer for use with 70/100V installations.

For easy and secure installation, all i-series models are supplied with adjustable wall mount brackets.



**NEW**

i4 / i4T  
black

i4 / i4T  
white

#### Power specifications

**25w RMS**

**50w Programme**

**100w Peak**




**1**

**Adjustable wall mount brackets included**

**2**

**Simple wiring with rear panel screw terminal connections**

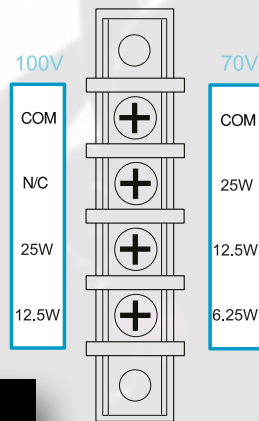

**3**

**With IP54 certification, i4 & i4T are protected from limited dust ingress and are protected from water spray from any direction.**



### WHAT MAKES THEM GREAT?

- Durable ABS construction with full face grille
- Integral mounting bracket - included
- Seismic restraint tethers - included
- i4 / i4T : 4.0" LF driver with 1" dome HF tweeter
- Low impedance and transformer versions available
- Screw terminal connections
- Available in BLACK or WHITE

### WHEN ARE THEY AVAILABLE?

#### i4 and i4T

**BLACK OR WHITE**

Shipping from **JULY 2020**

#### Note

i4 / i4T are packed and sold in PAIRS.  
1pc = 2 loudspeakers & 2 brackets



# SERIES SPECIFICATIONS



Model Name	i4	i4T	i6	i6T	i8	i8T
System Type	Passive	Passive	Passive	Passive	Passive	Passive
Configuration	Two-way	Two-way	Two-way	Two-way	Two-way	Two-way
Freq Response (+/-3dB)	100Hz - 20kHz	100Hz - 20kHz	70Hz - 20kHz	70Hz - 20kHz	70Hz - 20kHz	70Hz - 20kHz
Freq Range (-10dB)	60Hz - 20kHz	60Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz
Sensitivity (2.83v/1m)	84dB	83dB	86dB	85dB	87dB	86dB
Calculated Max SPL @1m	105dB	95dB	109dB	102dB	110dB	103dB
System Impedance	8Ω	n/a	8Ω	n/a	8Ω	n/a
<b>Low Frequency Transducer</b>						
Size	4"	4"	6.5"	6.5"	8"	8"
Voice Coil Size	1"	1"	1"	1"	1"	1"
Rated Impedance	8Ω	8Ω	8Ω	8Ω	8Ω	8Ω
LF Power (re:AES2-2012)	25W	25W	50W	50W	50W	50W
<b>High Frequency Transducer</b>						
HF Driver Type	Soft dome tweeter	Soft dome tweeter	Soft dome tweeter	Soft dome tweeter	Soft dome tweeter	Soft dome tweeter
Voice Coil Size	1"	1"	1"	1"	1"	1"
Diaphragm Material	Silk	Silk	Silk	Silk	Silk	Silk
Rated Impedance	8Ω	8Ω	8Ω	8Ω	8Ω	8Ω
HF Power (re:AES2-2012)	10W	10W	10W	10W	10W	10W
Nominal Coverage (H x V)	110° x 130°	110° x 130°	150° x 170°	150° x 170°	130° x 180°	130° x 180°
<b>Power</b>						
System Continuous Power	25w	70v : 6.25w /12.5w/25w	50w	70v : 12.5w /25w/50w	50w	70v : 12.5w /25w/50w
System Programme Power	50w	100v : 12.5w / 25w	100w	100v : 25w / 50w	100w	100v : 25w / 50w
System Peak Power	100w		200w		200w	
Crossover frequency	2.8kHz	2.8kHz	2.2kHz	2.2kHz	2.0kHz	2.0kHz
Input Connector	Screw terminal	Screw terminal	Phoenix terminal	Phoenix terminal	Phoenix terminal	Phoenix terminal
Hardware	Wall bracket included	Wall bracket included	Wall bracket included	Wall bracket included	Wall bracket included	Wall bracket included
<b>Enclosure</b>						
Enclosure Material and finish	Plastic (ABS)	Plastic (ABS)	Plastic (ABS)	Plastic (ABS)	Plastic (ABS)	Plastic (ABS)
Colour Options	Black or White	Black or White	Black or White	Black or White	Black or White	Black or White
Grille Material & Finish	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
<b>Dimensions - Unpacked</b>						
Height	232mm/9.1"	232mm/9.1"	370mm/14.6"	370mm/14.6"	405mm / 15.8"	405mm / 15.8"
Width	160mm/6.3"	160mm/6.3"	245mm/9.6"	245mm/9.6"	270mm / 10.6"	270mm / 10.6"
Depth	148mm/5.8"	148mm/5.8"	216mm/8.5"	216mm/8.5"	234mm / 9.2"	234mm / 9.2"
<b>Dimensions - Packed(1 PAIR)</b>						
Height	335mm/13.2"	335mm/13.2"	495mm/19.5"	495mm/19.5"	549mm / 21.6"	549mm / 21.6"
Width	425mm/16.7"	425mm/16.7"	565mm/22.3"	565mm/22.3"	602mm / 23.7"	602mm / 23.7"
Depth	210mm/8.3"	210mm/8.3"	340mm/13.4"	340mm/13.4"	363mm / 14.3"	363mm / 14.3"
<b>Weight</b>						
Net Weight (single speaker)	2.1kg / 4.62lbs	2.72kg / 5.98lbs	4.3kg / 9.46lbs	5.3kg / 11.6lbs	4.7kg / 10.34lbs	5.7kg / 12.54lbs
Gross Weight(1PAIR,Inc Bracket)	5.86kg / 12.9lbs	7.1kg / 15.6lbs	11.12kg / 24.5lbs	13.75kg / 30.25lbs	12.7kg / 27.9lbs	14.7kg / 32.34lbs

Errors and omissions excepted (E&OE) : Wharfedale Pro : 2020

