


## FEATURES

- \* 5-channel MIC input and 3-channel Aux input.
- \* With 1-channel EMC input.
- \* Independent volume control, MASTER volume control.
- \* With compulsive insert and Priority function.
- \* MIC balance input interface with phantom power.
- \* Individual Gain control for MIC.
- \* EMC has priority over all inputs except MIC 2
- \* Bass and Treble Tone Control.
- \* AC 110V or 230V and DC 24V operation.

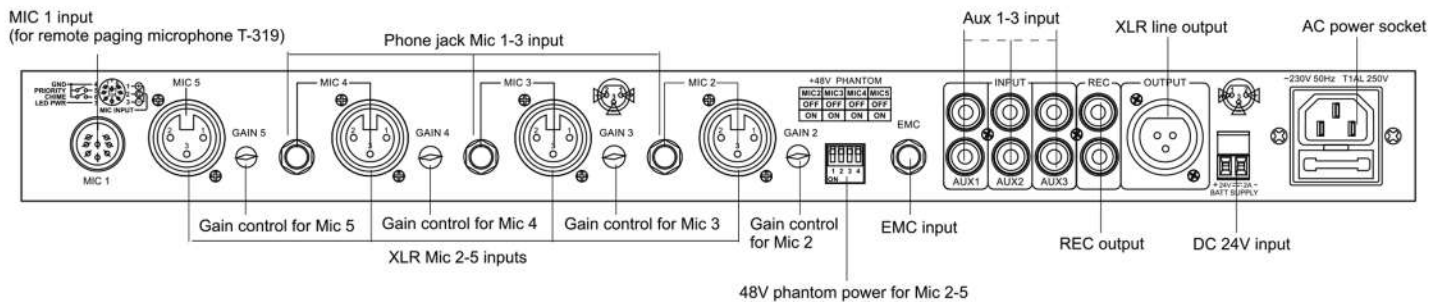

<b>Model</b>	MPP-53
<b>Input</b>	MIC 1, 2, 3, 4, 5: 5mV/600Ω Balanced AUX 1, 2, 3: 10KΩ/200mV, Unbalanced
<b>Output</b>	600Ω/1V/0dBV
<b>Frequency Response</b>	20Hz~20KHz (±1dB)
<b>S/N Ratio</b>	MIC input: 80dB AUX input: 85dB
<b>Tone</b>	Bass: ±10dB at 100Hz Treble: ±10dB at 10KHz
<b>Power Supply</b>	~110V-230V 50/60Hz
<b>Dimensions</b>	484 x 298 x 44mm
<b>Weight</b>	4.22Kg