



NEW PRODUCT INFORMATION

i8

i8T

Installation loudspeakers

The i8 and i8T are two-way high performance loudspeakers specifically designed for distributed music, paging and speech applications.

Each model features a quality 8" low frequency transducer and 1" dome tweeter housed inside a durable ABS enclosure - with a full protective frontal grille.

Both models feature Phoenix (Euroblock) input connections for easy on-site wiring, and both models are supplied with a sturdy, adjustable wall mounting bracket.

i8 is a low-impedance 8Ω model and i8T features an internal transformer for use with 70/100V installations.

Power specifications

50w RMS 100w PRG 200w Peak

Note

i8 and i8T are packed and sold in PAIRS.
1pc = 2 loudspeakers



WHAT MAKES THEM GREAT?


- ✓ Durable ABS construction with full face grille
- ✓ Integral mounting bracket - included
- ✓ Seismic restraint tethers - included
- ✓ 8" LF driver with 1" dome HF tweeter
- ✓ Low impedance and transformer versions available

WHEN ARE THEY AVAILABLE?

i8 i8T

Shipping from **MAY 2019**

NEW

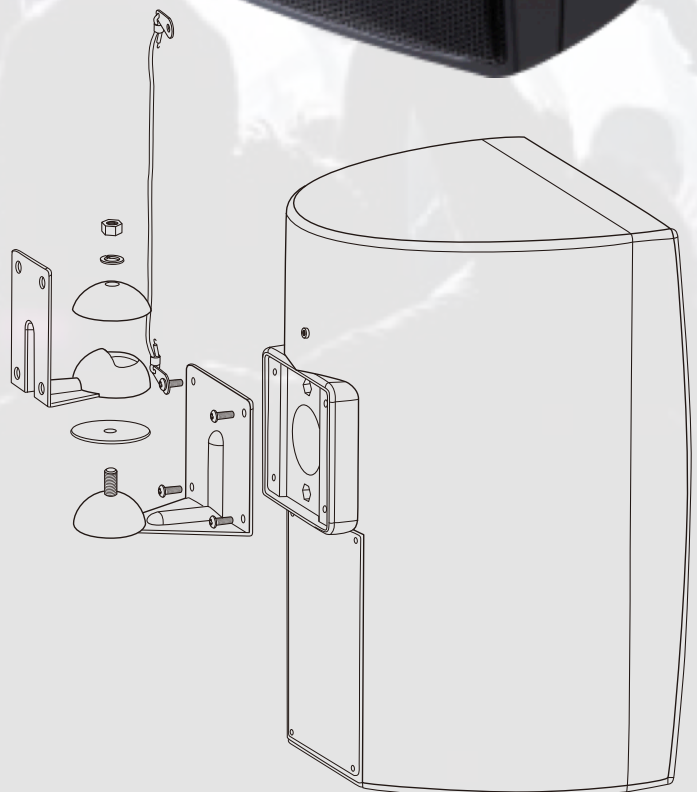

SPECIFICATIONS



Model Name	i8	i8T
System Type	Passive	Passive
Configuration	Two-way	Two-way
Frequency Response (+/-3dB)	70Hz - 20kHz	70Hz - 20kHz
Frequency Range (-10dB)	50Hz - 20kHz	50Hz - 20kHz
Sensitivity (2.83v/1m)	87dB	86dB
Calculated Maximum SPL @1m	110dB	103dB
System Rated Impedance	8Ω	8Ω
Low Frequency Transducer		
Size	8"	8"
Voice Coil Size	1"	1"
Rated Impedance	8Ω	8Ω
LF Power (re:AES2-2012)	50W	50W
High Frequency Transducer		
HF Driver Type	Soft dome tweeter	Soft dome tweeter
Voice Coil Size	1"	1"
Diaphragm Material	Silk	Silk
Rated Impedance	4Ω	4Ω
HF Power (re:AES2-2012)	10W	10W
Nominal Coverage (H x V)	130° x 180°	130° x 180°
Power		
System Continuous Power	50w	70v : 12.5w / 25w / 50w
System Programme Power	100w	100v : 25w / 50w
System Peak Power	200w	
Crossover frequency	2.0kHz	2.0kHz
Input Connector	Phoenix terminal	Phoenix terminal
Hardware	Wall mount bracket included	Wall mount bracket included
Enclosure		
Enclosure Material and finish	Plastic (ABS)	Plastic (ABS)
Colour Options	Black	Black
Grille Material & Finish	Aluminium	Aluminium
Dimensions - Unpacked		
Height	405mm / 15.8"	405mm / 15.8"
Width	270mm / 10.6"	270mm / 10.6"
Depth	234mm / 9.2"	234mm / 9.2"
Dimensions - Packed		
Height	602mm / 23.7"	602mm / 23.7"
Width	363mm / 14.3"	363mm / 14.3"
Depth	549mm / 21.6"	549mm / 21.6"
Weight		
Net Weight (single speaker)	4.7kg / 10.34lbs	5.7kg / 12.54lbs
Gross Weight (1PAIR inc brackets)	12.7kg / 27.9lbs	14.7kg / 32.34lbs

